

Aurora 200B

LAMPHEAD CONTENTS

- Lamp Housing with Soft Diffusion Filter
- Stirrup with Ø28mm (1-1/8 in.) Spigot
- AC Power Cable
- DC Power Cable




AURORA 200B

SPECIFICATIONS

Identity No.	L0020CCT
Max. Capacity	200W
Input Voltage	95 - 260V AC 22 - 36V DC
Input Current	1A @ 220V AC 8.5A @ 24V DC
Color Temp. Range	2700K ~ 6000K
CRI	Average > 95
TLCI	Average > 95
Dimming Range	0-100%
Control Signal	DMX 512
DMX Channel	2
LED Lifetime	30,000 Hrs (Estimated)
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	60 °C
Max. Ambient Temp.	45 °C
Operating Range	+90° ~ 0° ~ -90°
Weight (Lamphead)	9kg

PHOTOMETRIC DATA

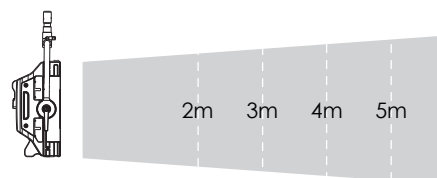


5600K	Lux	1763	735	441	282
3200K	Lux	1563	680	391	250

Naked, without diffuser


ACCESSORIES

- 4-leaf Barndoor
- Softbox
- Soft Eggcrate
- Metal Eggcrate
- Lantern with Skrit
- P.O. Stirrup with Ø28mm (1-1/8 in.) Spigot
- Safety Cable (for lamphead)


DIMENSIONS (mm)

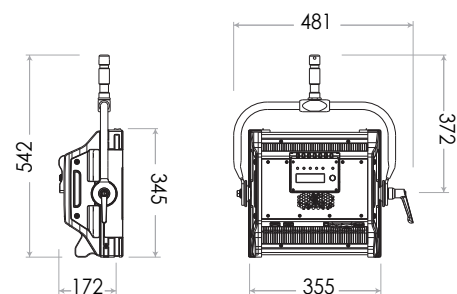

SPECTRUM

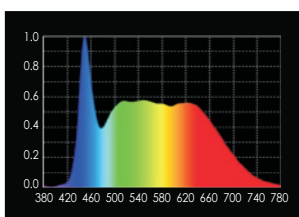


5600K

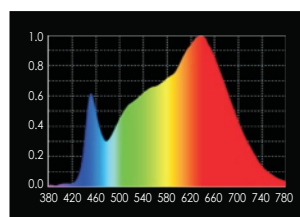


3200K

HISTOGRAM

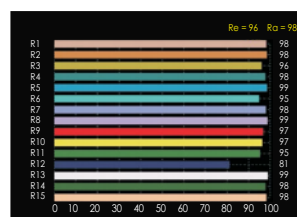

5600K

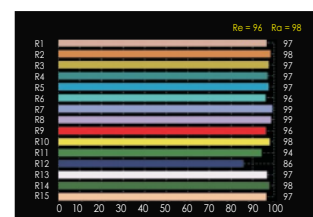

3200K

Aurora 400B

LAMPHEAD CONTENTS

- Lamp Housing with Soft Diffusion Filter
- Stirrup with Ø28mm (1-1/8 in.) Spigot
- AC Power Cable
- DC Power Cable

AURORA 400B



SPECIFICATIONS

Identity No.	L0040CCT
Max. Capacity	400W
Input Voltage	95 - 260V AC 22 - 36V DC
Input Current	2A @ 220V AC 17A @ 24V DC
Color Temp. Range	2700K - 6000K
CRI	Average > 95
TLCI	Average > 95
Dimming Range	0-100%
Control Signal	DMX 512
DMX Channel	2
LED Lifetime	30,000 Hrs (Estimated)
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	60 °C
Max. Ambient Temp.	45 °C
Operating Range	+90° ~ 0° ~ -90°
Weight (Lamphead)	13kg


ACCESSORIES

- 4-leaf Barndoor
- Softbox
- Soft Eggcrate
- Metal Eggcrate
- Lantern with Skrit
- P.O. Stirrup with Ø28mm (1-1/8 in.) Spigot
- Safety Cable (for lamphead)

SPECTRUM

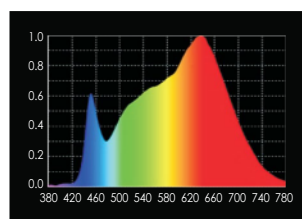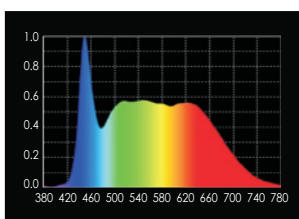


PHOTOMETRIC DATA

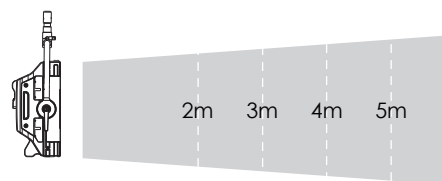



5600K	Lux	3575	1710	894	572
3200K	Lux	3250	1573	813	520

Naked, without diffuser

DIMENSIONS (mm)

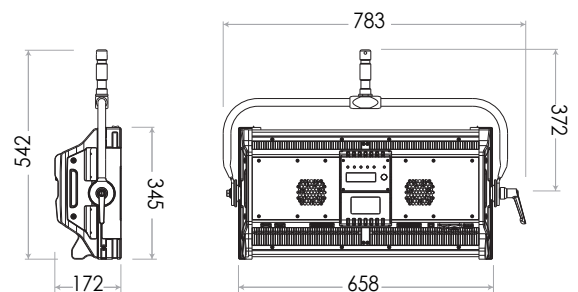

HISTOGRAM

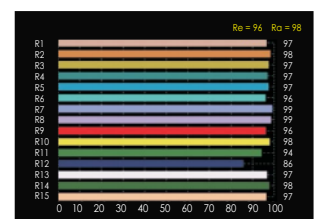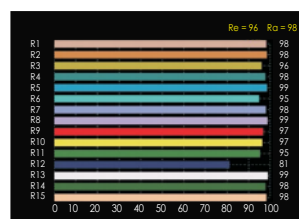

Aurora 200c

LAMPHEAD CONTENTS

- Lamp Housing with Soft Diffusion Filter
- Stirrup with Ø28mm (1-1/8 in.) Spigot
- AC Power Cable
- DC Power Cable

AURORA 200C


SPECIFICATIONS

Identity No.	L0020RGB
Max. Capacity	200W
Input Voltage	95V ~ 260V AC 22V ~ 36V DC
Input Current	1A @ 220V AC 8.5A @ 24V DC
Color Temp. Range	2700K - 10000K
Color	R/G/B/WW/CW color mixing
CRI	Average > 95
TLCI	Average > 95
Dimming Range	0-100%
Control Signal	DMX / RDM
DMX Channel	Varied (depends on DMX mode selection)
LED Lifetime	30,000 Hrs (Estimated)
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	60 °C
Max. Ambient Temp.	45 °C
Operating Range	+90° ~ 0° ~ -90°
Weight (Lamphead)	9kg

ACCESSORIES

- 4-leaf Barndoor
- Softbox
- Soft Eggcrate
- Metal Eggcrate
- Lantern with Skrit
- P.O. Stirrup with Ø28mm (1-1/8 in.) Spigot
- Safety Cable (for lamphead)


SPECTRUM

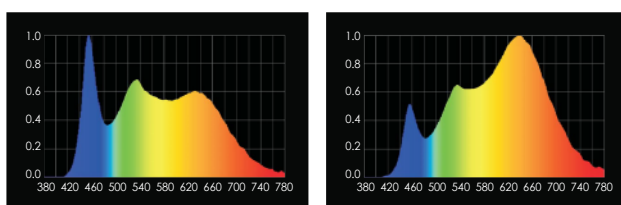

5600K


3200K

HISTOGRAM

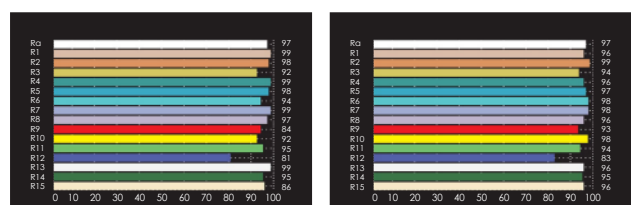


5600K

3200K

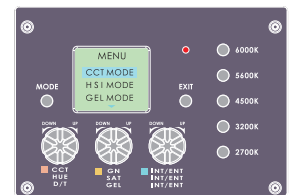

Control Panel


PHOTOMETRIC DATA

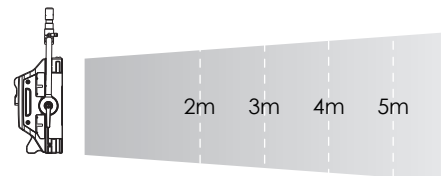

5600K Lux	2406	980	602	385
3200K Lux	1938	800	484	310

Naked, without diffuser

DIMENSIONS (mm)

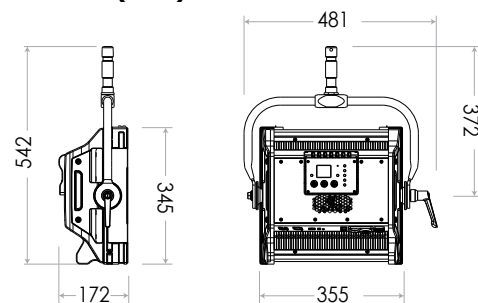

Aurora 400c

LAMPHEAD CONTENTS

- Lamp Housing with Soft Diffusion Filter
- Stirrup with Ø28mm (1-1/8 in.) Spigot
- AC Power Cable
- DC Power Cable

AURORA 400C


SPECIFICATIONS

Identity No.	L0040RGB
Max. Capacity	400W
Input Voltage	95V ~ 260V AC 22V ~ 36V DC
Input Current	2A @ 220V AC 17A @ 24V DC
Color Temp. Range	2700K - 10000K
Color	R/G/B/WW/CW color mixing
CRI	Average > 95
TLCI	Average > 95
Dimming Range	0-100%
Control Signal	DMX / RDM
DMX Channel	Varied (depends on DMX mode selection)
LED Lifetime	30,000 Hrs (Estimated)
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	60 °C
Max. Ambient Temp.	45 °C
Operating Range	+90° ~ 0° ~ -90°
Weight (Lamphead)	13kg

ACCESSORIES

- 4-leaf Barndoor
- Softbox
- Soft Eggcrate
- Metal Eggcrate
- Lantern with Skrit
- P.O. Stirrup with Ø28mm (1-1/8 in.) Spigot
- Safety Cable (for lamphead)

SPECTRUM

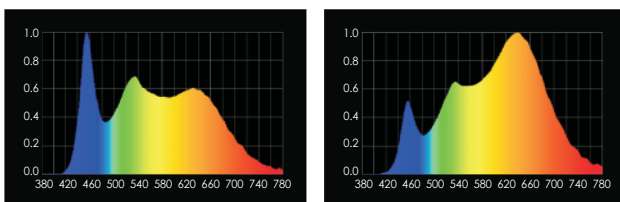


5600K

3200K



Control Panel


PHOTOMETRIC DATA

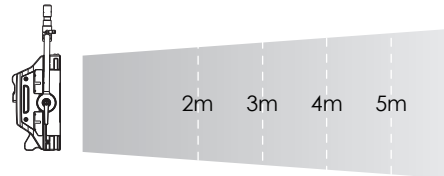


5600K	Lux	4738	1940	1184	758
3200K	Lux	4000	1610	1000	640

Naked, without diffuser

DIMENSIONS (mm)

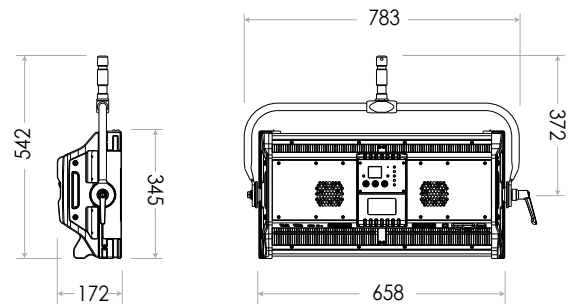

HISTOGRAM

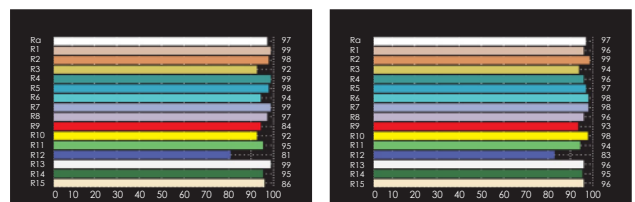

5600K

3200K