

**Daylight Par
Faceted
F800
FACETED**



LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø208mm UV Protective Lens
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot


Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

Daylight Par Faceted F800

SPECIFICATIONS

Identity No.	L0080FPS
Capacity	800W
Lamp Bulb Voltage	95V
UV Protective Lens	Ø208mm
Lamp Type	CSR 800W SE/HR
Color Temp.	5600K
Lamp Holder	G22
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	150 °C
Min. Distance to Illuminated Object	3.5m
Min. Distance to Flammable Object	0.5m
Operating Range	+45° ~ 0° ~ -45°
Weight (Lamphead)	6.7kg
Weight (with barndoor)	8kg

PHOTOMETRIC DATA

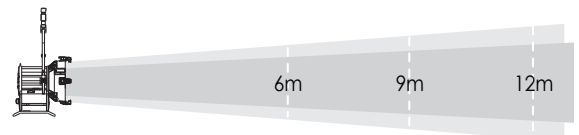


800W				
Spot	Lux	9369	4284	2476
15.8°	Beam Ø	1.66 m	2.49 m	3.32 m
Flood	Lux	856	390	215
84.8°	Beam Ø	10.96 m	16.44 m	21.92 m

ACCESSORIES

- Electronic Ballast V3 : 800W/575W
- Lamphead to Ballast Cable : 7m (23 ft.) or 15m (49 ft.)
- 4-leaf Rotatable Barndoor
- Set of 4 Scrims Ø254mm :
 - Full Single, Full Double, Half Single, Half Double
- Scrim Bag
- Safety Cable (for lamphead)
- Safety Wire (for barndoor)
- Spill Ring

DIMENSIONS (mm)

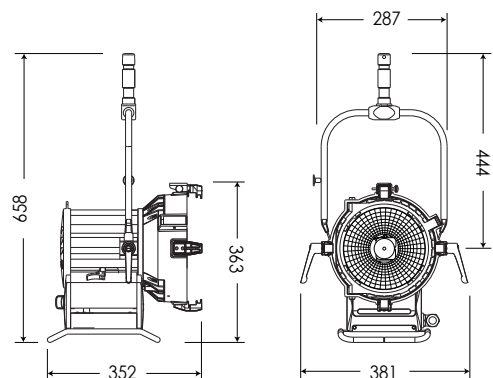

**Daylight Par
Faceted
F1,8k
FACETED**



LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø265mm UV Protective Lens
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot


Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

Daylight Par Faceted F1,8k

SPECIFICATIONS

Identity No.	L0180FPS
Capacity	1,800W
Lamp Bulb Voltage	140V
UV Protective Lens	Ø265 mm
Lamp Type	HMI 1800W/SE
Color Temp.	5600K
Lamp Holder	G38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	160 °C
Min. Distance to Illuminated Object	4.5m
Min. Distance to Flammable Object	1m
Operating Range	+45° ~ 0° ~ -45°
Weight (Lamphead)	12kg
Weight (with barndoor)	14kg

PHOTOMETRIC DATA

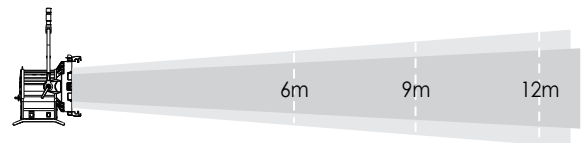


1800W				
Spot	Lux	19000	9000	5000
17.1°	Beam Ø	1.80 m	2.57 m	3.47 m
Flood				
73.7°	Beam Ø	9.00 m	13.50 m	18.00 m

ACCESSORIES

- Electronic Ballast V3 : 1.8kW/1.2kW/575W
- Lamphead to Ballast Cable : 7m (23 ft.) or 15m (49 ft.)
- 4-leaf Rotatable Barndoor
- Set of 4 Scrims Ø330mm :
 - Full Single, Full Double, Half Single, Half Double
- Scrim Bag
- Safety Cable (for lamphead)
- Safety Wire (for barndoor)
- Spill Ring

DIMENSIONS (mm)

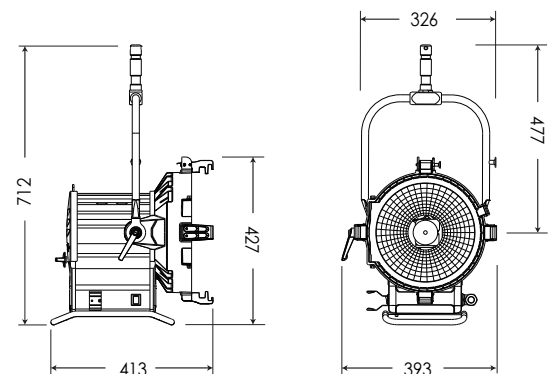

**Daylight Par
Faceted
F4K
FACETED**



LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø335mm UV Protective Lens
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot


Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

Daylight Par Faceted F4k

SPECIFICATIONS

Identity No.	L0400FPS
Capacity	4,000W
Lamp Bulb Voltage	200V
UV Protective Lens	Ø335 mm
Lamp Type	HMI 4000W/SE
Color Temp.	5600K
Lamp Holder	G38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	190 °C
Min. Distance to Illuminated Object	10m
Min. Distance to Flammable Object	1m
Operating Range	+45° ~ 0° ~ -45°
Weight (Lamphead)	19kg
Weight (with barndoor)	22kg

PHOTOMETRIC DATA

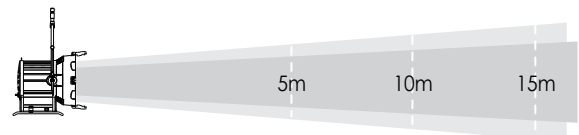


4kW					
Spot	Lux	80333	20083	8926	
15.4°	Beam Ø	1.35 m	2.7 m	4.06 m	
Flood					
63.6°	Lux	11633	2908	1293	
	Beam Ø	6.2 m	12.4 m	18.6 m	

ACCESSORIES

- Electronic Ballast V3 : 4kW/2.5kW
- Lamphead to Ballast Cable : 7m (23 ft.) or 15m (49 ft.)
- 4-leaf Rotatable Barndoor
- Set of 4 Scrims Ø394mm :
 - Full Single, Full Double, Half Single, Half Double
- Scrim Bag
- Safety Cable (for lamphead)
- Safety Wire (for barndoor)
- Spill Ring

DIMENSIONS (mm)

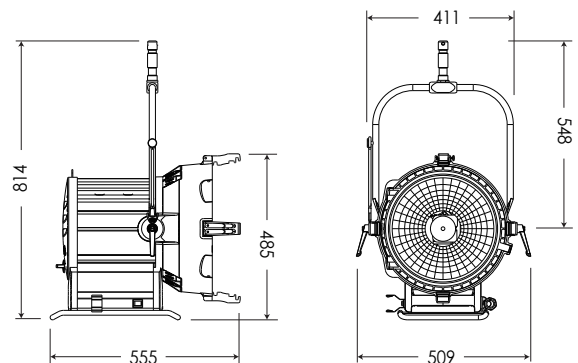

**Daylight Par
Faceted
F9K
FACETED**



LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø500mm UV Protective Lens
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot


Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

Daylight Par Faceted F9k

SPECIFICATIONS

Identity No.	L0900FPS
Capacity	9,000W
Lamp Bulb Voltage	160V
UV Protective Lens	Ø500mm
Lamp Type	HMI 9000W/SE
Color Temp.	5600K
Lamp Holder	GX38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	220 °C
Min. Distance to Illuminated Object	12m
Min. Distance to Flammable Object	2m
Operating Range	+45° ~ 0° ~ -45°
Weight (Lamphead)	35kg
Weight (with barndoor)	40kg

PHOTOMETRIC DATA

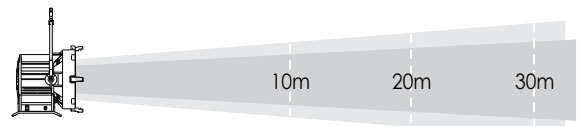


9kW					
Spot	Lux	51783	12946	5754	
15°	Beam Ø	2.63 m	5.27 m	7.9 m	
Flood	Lux	7775	1944	864	
54°	Beam Ø	10.19 m	20.38 m	30.57 m	

ACCESSORIES

- Electronic Ballast V3 : 9kW/6kW
- Lamphead to Ballast Cable : 10m (33 ft.) or 15m (49 ft.)
- 4-leaf Rotatable Barndoor
- Set of 4 Scrimms Ø568mm :
 - Full Single, Full Double, Half Single, Half Double
- Scrim Bag
- Safety Cable (for lamphead)
- Safety Wire (for barndoor)
- Spill Ring

DIMENSIONS (mm)

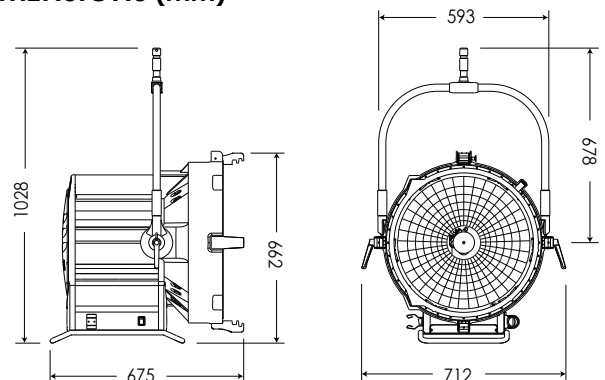

**Daylight Par
Faceted
F18k
FACETED**



LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø645mm UV Protective Lens
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot


Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

Daylight Par Faceted F18k

SPECIFICATIONS

Identity No.	L1800FPS
Capacity	18,000W
Lamp Bulb Voltage	225V
UV Protective Lens	Ø645mm
Lamp Type	HMI 18000W/SE
Color Temp.	5600K
Lamp Holder	GX51
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	260 °C
Min. Distance to Illuminated Object	15m
Min. Distance to Flammable Object	2m
Operating Range	+45° ~ 0° ~ -45°
Weight (Lamphead)	66kg
Weight (with barndoor)	72kg

PHOTOMETRIC DATA

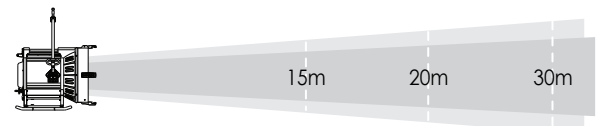

18kW				
Spot	Lux	50618	32490	14440
15°	Beam Ø	3.9 m	5.3 m	7.9 m
Flood	Lux	9476	3365	1495
50°	Beam Ø	14.0 m	18.7 m	28.0 m

ACCESSORIES

- Electronic Ballast V3 : 18kW/12kW
- Lamphead to Ballast Cable : 15m (49 ft.) or 20m (66 ft.)
- 4-leaf Rotatable Barndoor
- Set of 4 Scrimms Ø737mm :
 - Full Single, Full Double, Half Single, Half Double
- Scrim Bag
- Safety Cable (for lamphead)
- Safety Wire (for barndoor)
- Spill Ring

DIMENSIONS (mm)

