



Maxibrute 6

LAMPHEAD CONTENTS

- Lamp Housing without Bulb # (black color)
- Wire Guard
- Stirrup with Ø28mm (1-1/8 in.) Spigot

Requires Lamp Bulb

Maxibrute 6

SPECIFICATIONS

Identity No.	L06001COMXB (220V)
	L061S1COMXB (220V)
	L06001C1MXB (110V)
	L061S1C1MXB (110V)
Capacity	6,000W
Voltage	220 - 240V AC or 110 - 120V AC
Lamp Type	Par64 1000W 120V/240V
Color Temp.	5000K / 3200K
Lamp Holder	GX16d
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class	1
Max. Surface Temp.	200°C
Max. Ambient Temp.	45°C
Min. Distance to Illuminated Object	5m
Min. Distance to Flammable Object	1.5m
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	18.8kg

ACCESSORIES

- 2-leaf Rotatable Barndoor
- Safety Wire (for barndoor)
- Filter Frame Outrigger
- Studio Dolly

INPUT PANEL


L06001COMXB, L06001C1MXB :

1 x CEE 32A 2P+E

L061S1COMXB, L061S1C1MXB :

1 x Socapex, 1 x CEE 32A 2P+E

DIMENSIONS (mm)

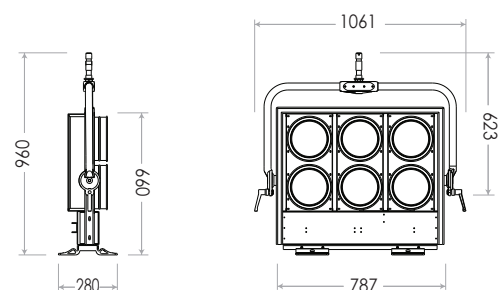



Maxibrute 9

LAMPHEAD CONTENTS

- Lamp Housing without Bulb # (black color)
- Wire Guard
- Stirrup with Ø28mm (1-1/8 in.) Spigot

Requires Lamp Bulb

Maxibrute 9

SPECIFICATIONS

Identity No.	L09001COMXB (220V)
	L092S1COMXB (220V)
	L09001C1MXB (110V)
	L092S1C1MXB (110V)
Capacity	9,000W
Voltage	220 - 240V AC or 110 - 120V AC
Lamp Type	Par64 1000W 120V/240V
Color Temp.	5000K / 3200K
Lamp Holder	GX16d
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class	1
Max. Surface Temp.	200°C
Max. Ambient Temp.	45°C
Min. Distance to Illuminated Object	8m
Min. Distance to Flammable Object	1.5m
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	22kg

ACCESSORIES

- 2-leaf Rotatable Barndoor
- Safety Wire (for barndoor)
- Filter Frame Outrigger
- Studio Dolly

INPUT PANEL


L09001COMXB, L09001C1MXB :

1 x CEE 63A 2P+E

L092S1COMXB, L092S1C1MXB :

2 x Socapex, 1 x CEE 63A 2P+E

DIMENSIONS (mm)

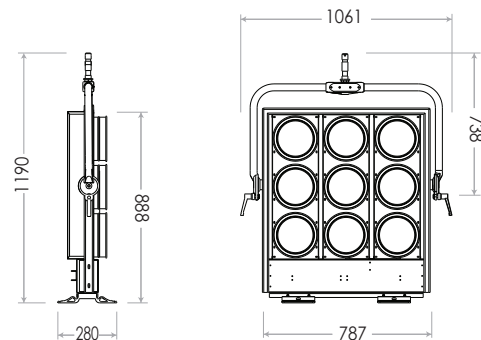



Maxibrute 12

LAMPHEAD CONTENTS

- Lamp Housing without Bulb # (black color)
- Wire Guard
- Stirrup with Ø28mm (1-1/8 in.) Spigot

Requires Lamp Bulb

Maxibrute 12

SPECIFICATIONS

Identity No.	L12001COMXB (220V)
	L122S1COMXB (220V)
	L12001C1MXB (110V)
	L122S1C1MXB (110V)
Capacity	12,000W
Voltage	220 - 240V AC or 110 - 120V AC
Lamp Type	Par64 1000W 120V/240V
Color Temp.	5000K / 3200K
Lamp Holder	GX16d
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class	1
Max. Surface Temp.	200°C
Max. Ambient Temp.	45°C
Min. Distance to Illuminated Object	10m
Min. Distance to Flammable Object	1.5m
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	28kg

ACCESSORIES

- 2-leaf Rotatable Barndoor
- Safety Wire (for barndoor)
- Filter Frame Outrigger
- Studio Dolly

INPUT PANEL


L12001COMXB, L12001C1MXB :

1 x CEE 63A 2P+E

L122S1COMXB, L122S1C1MXB :

2 x Socapex, 1 x CEE 63A 2P+E

DIMENSIONS (mm)

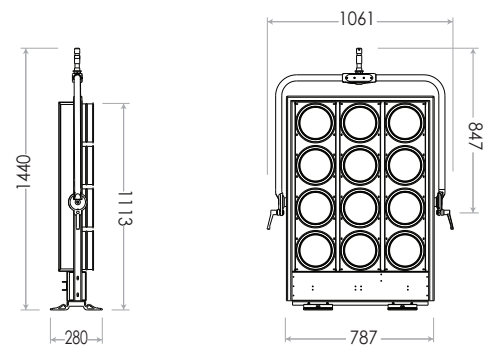



Maxibrute 24

LAMPHEAD CONTENTS

- Lamp Housing without Bulb # (black color)
- Wire Guard
- Stirrup with Ø28mm (1-1/8 in.) Spigot

Requires Lamp Bulb

Maxibrute 24

SPECIFICATIONS

Identity No.	L24002COMXB (220V)
	L244S2COMXB (220V)
	L24002C1MXB (110V)
	L244S2C1MXB (110V)
Capacity	24,000W
Voltage	220 - 240V AC or 110 - 120V AC
Lamp Type	Par64 1000W 120V/240V
Color Temp.	5000K / 3200K
Lamp Holder	GX16d
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class	1
Max. Surface Temp.	200°C
Max. Ambient Temp.	45°C
Min. Distance to Illuminated Object	12m
Min. Distance to Flammable Object	1.5m
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	46.5kg

ACCESSORIES

- 2-leaf Rotatable Barndoor
- Safety Wire (for barndoor)
- Filter Frame Outrigger
- Studio Dolly

INPUT PANEL

L24002COMXB, L24002C1MXB :

2 x CEE 63A 2P+E

L244S2COMXB, L244S2C1MXB :

4 x Socapex, 2 x CEE 63A 2P+E

DIMENSIONS (mm)

