

Zenith 700C

WEATHER RESISTANT IP65

FILMGEAR

HIGH POWER LED PANEL

RGB

LAMPHEAD CONTENTS

- Lamp Housing with Power Cable
- Stirrup with Ø28mm Spigot
- Diffuser
- AC Power Cable

SPECIFICATIONS

Identity No.	L0070PPC
Max. Capacity	700W
Input Voltage	100 - 240V AC / 48V DC
Input Current	3.2A @220V AC / 14.6A @48V DC
Color Temp. Range	2700K ~ 10000K
Color	R/G/B/W color mixing
CRI	Average >95
TLCI	Average >90
Dimming Range	0-100%
Control Signal	DMX / RDM
LED Lifetime	30,000 Hrs (Estimated)
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 65
Weight	21kg

PRODUCT FEATURES

- CRI > 95 and TLCI > 90
- IP 65 Weather Resistant
- CCT Mode : 2700K to 10000K, +/- Green / Magenta
- HSI Mode : Hue, Saturation & Intensity
- Gel Mode : > 300 Filters
- Communication : DMX XLR-5, CRMX (LumenRadio), Bluetooth, Ethernet, USB A

- Pattern Mode (User Define Scene) :



- Individual Pixel Control :



- Scene Mode :







PHOTOMETRIC DATA

		700c			
		2m	3m	4m	5m
5600K	Lux	38700	19600	11700	7660
22°	Beam Ø	1.17m	1.94m	2.72m	2.72m
3200K	Lux	42000	21200	12600	8280
22°	Beam Ø	1.17m	1.94m	2.72m	2.72m

ACCESSORIES



DIMENSIONS (mm)

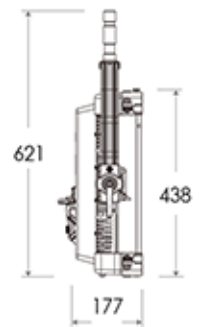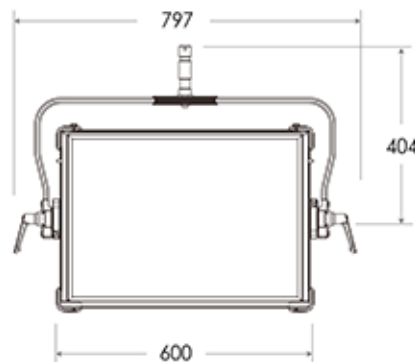

FILMGEAR

HIGH POWER LED PANEL
RGB

Zenith
1500c
1000c

WEATHER RESISTANT IP65



LAMPHEAD CONTENTS

- Lamp Housing with Power Cable
- Stirrup with Ø28mm Spigot
- Diffuser
- AC Power Cable

ACCESSORIES



PRODUCT FEATURES

- CRI > 95 and TLCI > 90
- IP 65 Weather Resistant
- CCT Mode : 2700K to 10000K, +/- Green / Magenta
- HSI Mode : Hue, Saturation & Intensity
- Gel Mode : > 300 Filters
- Communication : DMX XLR-5, CRMX (LumenRadio), Bluetooth, Ethernet, USB A

- Pattern Mode (User Define Scene) :



- Individual Pixel Control :




- Scene Mode :




SPECIFICATIONS

Zenith	1500c	1000c
Identity No.	L0150PPC	L0100PPC
Max. Capacity	1580W	1050W
Input Voltage	100 - 240V AC	
Input Current	7.2A@220V AC	4.8A@220V AC
Color Temp. Range	2700K ~ 10000K	
Color	R/G/B/W color mixing	
CRI	Average >95	
TLCI	Average >90	
Dimming Range	0-100%	
Control Signal	DMX / RDM	
LED Lifetime	30,000 Hrs (Estimated)	
Stirrup	Ø28mm (1-1/8 in.) Spigot	
Class / IP Rating	I / IP 65	
Weight	49kg	34kg

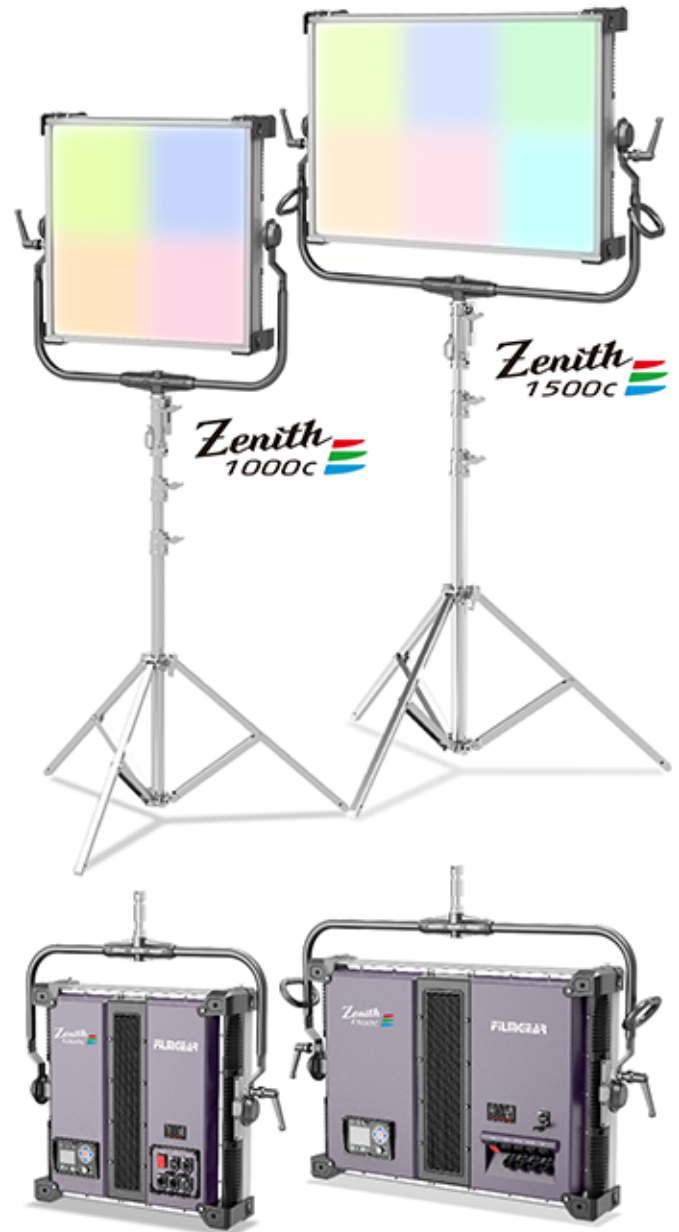

PHOTOMETRIC DATA

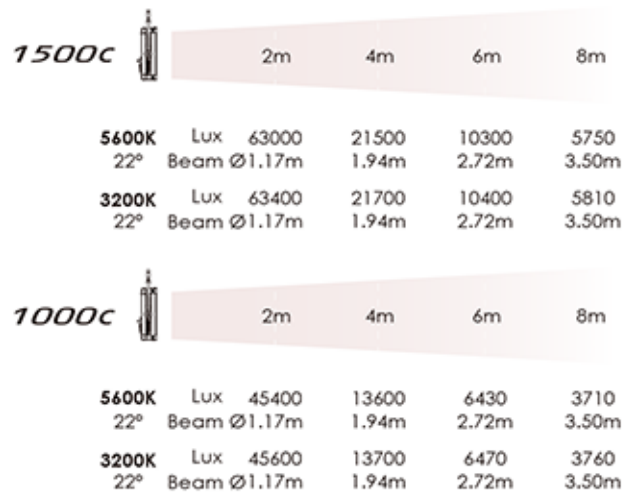

DIMENSIONS (mm)

